

DEWALT®

CATALOG

**FALL PROTECTION
DROP PREVENTION**



GUARANTEED TOUGH.®

DEWALT

THE HEIGHT OF SAFETY

INDEX

THE NEED FOR FALL PROTECTION IN A TOUGH WORK ENVIRONMENT


	Inside
OVERVIEW	Page 2-3
A,B,C,D's OF FALL PROTECTION	Page 4-5
ANCHORAGE	Page 6-10
CARABINERS	Page 11
HARNESSES	Page 12-17
SELF RETRACTING LIFELINES	Page 18-23
LANYARDS & WORK POSITIONING	Page 24-25
VERTICAL & HORIZONTAL LIFELINES	Page 26-27
ROOF TOP SAFETY KITS	Page 28-29
FALL PROTECTION KITS	Page 30-31
DROP PREVENTION	Page 32-39

THE NEED FOR HEIGHT SAFETY

Whether you're up on a roof, building a skyscraper or on a scaffolding or a ladder, you need to have confidence in your safety equipment to keep you and others safe and sound. DEWALT® Fall Protection and Drop Prevention products are built for the toughest work environments and to highest standards, allowing you to focus on the job at hand and not on your safety equipment.

FALL FROM HEIGHTS IS THE SECOND LEADING UNINTENTIONAL FATAL WORKPLACE EVENT

(Representing 38% of all construction fatalities)

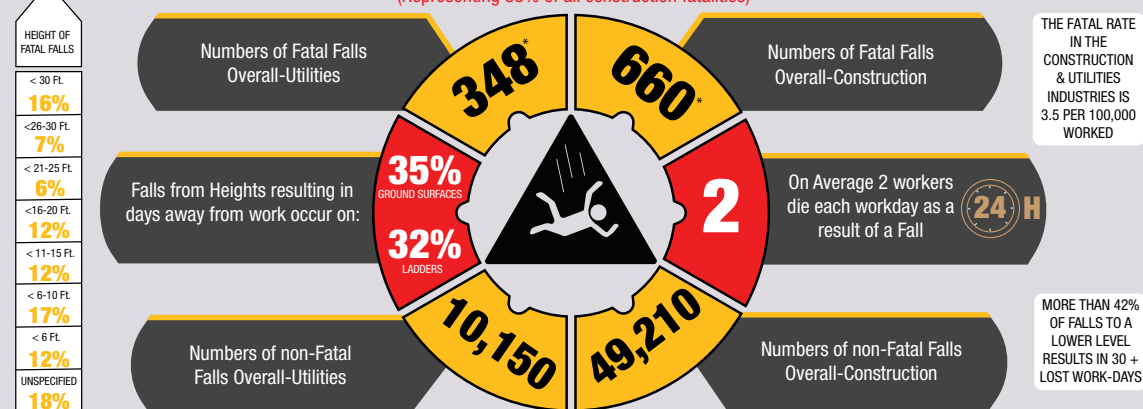

* Bureau of Labor Statistic

National Safety Council 2022

GUARANTEED TOUGH.®



THE KEY ELEMENTS OF A FALL PROTECTION SYSTEM

4 VITAL COMPONENTS FOR A PERSONAL FALL ARREST SYSTEM.

THESE ARE THE ABCD'S OF FALL PROTECTION:

A Anchorage **B** Body Wear **C** Connection Device **D** Descent/Rescue

THIS IS A SECURE POINT OF ATTACHMENT FOR LIFELINES, LANYARDS OR DECELERATION DEVICES

The only form of body wear acceptable for fall arrest is the full-body harness.

A Anchorage/Anchorage Connector
Anchorage: Commonly referred to as a tie-off point (Example: I-beam)
Anchorage Connector: to join the connecting device to the anchorage. (Example: anchor strap)

B Body Wear
Body Wear: The personal protection equipment worn by the worker. (Example: full-body harness)

C Connecting Device
Connecting Device: The critical link which joins the body wear to the anchorage/anchorage connector. (Example: shock-absorbing lanyard or retractable lifeline).

D Descent/Rescue: refers to the rescue plan for a fallen worker, which is a critical element of any fall protection program. Suspension Trauma Straps and winch System are often used in the Descent Rescue plan.

Each one must be in place and properly used to provide maximum worker protection.

Be sure to calculate potential fall distance when selecting connecting components.

DL503001 ABCD Rev.A 11/23/2021



ANCHORAGE

Selecting the right anchorage connector for your fall arrest system is a critical part of protecting yourself from worksite fall hazards.

DEWALT® anchorage connectors help workers do their jobs with confidence by manufacturing anchors that have been rigorously tested to meet or exceed OSHA and ANSI standards.

Designed to fit a wide range of general and specialty applications, DEWALT® has an anchorage connector to meet most steel, concrete, roofing and specialty anchorage needs.

DEWALT

STEEL ANCHORS

ANCHOR POINT - BOLT DOWN D-RING - STAINLESS STEEL

DXFP843001

- Stainless steel Bolt Down D-Ring anchor point provides a strong, reusable and corrosion resistant anchor point for multiple applications.
- Material: Steel
- Length: 4.5 in. (11.4 cm) Weight: 0.90 lbs. (404 gr)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



ANCHOR POINT - BOLT DOWN D-RING - ZINC PLATED STEEL

DXFP843002

- Zinc plated Bolt Down D-Ring anchor point provides a strong and reusable anchor point for multiple applications.
- Material: Zinc Plated Steel
- Overall Length: 4.5 in. (11.4 cm) Weight: 0.90 lbs. (404 gr)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



DEWALT

STEEL ANCHORS

ANCHOR POINT - REUSABLE STEEL GIRDER

DXFP845001

- Steel Girder Anchor is a removable and reusable anchor point to be mounted on solid steel structures, girders and steel I-beams. It can be installed very easily with one hand and is extremely portable. The maximum thickness of the structure on which installation is possible is 1.57 in. (4 cm).
- Material: Alloy Steel, Stainless Steel Moulded Polymer
- Length: 4.7 in. (11.4 cm) Weight: 1.21 lbs. (0.55 kg)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



BEAM ANCHOR - SLIDING FITS 3.5 in. TO 13.3 in. FLANGE

DXFP846011

- Fixed Beam Anchor is capable of being installed on the flange of horizontal beams. The variable position jaw adjustment enable it to be installed on flange widths of 3.5 in. (7.5 cm) to 13.3 in. (34 cm).
- Material: Aluminum Alloy, Brass
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



SINGLE POINT ANCHOR SWIVEL FOR METAL STRUCTURES

DXFP843102

- Swiveling Anchor Point for steel provides a strong, reusable and corrosion resistant anchor point for steel applications.
- Material: Steel
- Length: 4.45 in. (11.3 cm) Width: 3 in. (7.62 cm)
- Minimum Breaking Strength: 10,000 lbs. / 44 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



ANCHOR POINT - WELD-ON OR BOLT- ON D-RING - ZINC PLATED STEEL

DXFP844001

- Single point anchor is designed to be fixed on walls, ceilings, rooftops or steel structures. It can be used to sustain the load impact in all three axis (X, Y, & Z)
- Material: Coated Steel
- Overall Height: 14.96 in. (38 cm) Width: 3 in. (7.62 cm)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ZANSI 359.18-2017, OSHA 1926.502, 1910.140



BEAM ANCHOR - SLIDING FITS 3 in. TO 5.9 in. FLANGE

DXFP846001

- Fixed Beam Anchor is capable of being installed on the flange of horizontal beams. The variable position jaw adjustment enable it to be installed on flange widths of 3 in. (7.5 cm) to 5.9 in. (15 cm).
- Material: Aluminum Alloy, Brass
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



BEAM ANCHOR - MOVABLE TROLLEY FITS 3.1 in. TO 9.8 in. FLANGE

DXFP846101

- Beam Trolley Anchor is capable of being installed on the flange of horizontal beams. The variable position jaw adjustment enable it to be installed on flange widths of 3.15 in. (8 cm) to 9.8 in. (25 cm) and high impact rollers provide easy mobility horizontally along a beam.
- Length: 18 in. (45.4 cm) Width: 5.9 in. (15 cm) Height: 5.9 in. (17.1 cm)
- Material: Aluminum Alloy, Stainless Steel
- Minimum Breaking Strength: 5,000 lbs / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



DEWALT

WEB & CABLE CHOKERS

ANCHORS

WEB ANCHOR STRAP- CHOCKER

LARGE AND SMALL D-RINGS WITH WEAR PAD

DXFP811003	3 ft. (0.9 m)
DXFP811004	4 ft. (1.2 m)
DXFP811006	6 ft. (1.8 m)

- Choker style web anchor strap provides a strong, durable and flexible temporary fall protection anchor solutions in a compact and lightweight design.
- Material: Polyester, steel
- Minimum Breaking Strength: 5000 lbs. / 23 kN
- Max capacity OSHA 420 lbs. (191 kg) / ANSI 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140




CABLE ANCHOR - CHOCKER

LARGE AND SMALL O-RINGS

DXFP821003	3 ft. (0.9 m)
DXFP821004	4 ft. (1.2 m)
DXFP821006	6 ft. (1.8 m)

- Choker style web anchor strap provides a strong, durable and flexible temporary fall protection anchor solutions in a compact and lightweight design.
- Material: Steel
- Minimum Breaking Strength: 5000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



DROP TROUGH ANCHOR WITH CABLE

DXFP822001	6 ft. (1.8 m)
------------	---------------

- Reusable Drop Through Swiveling Cable Anchor.
- 6 in. (15.2 cm) in diameter steel plate
- Designed to be used in either steel or concrete to provide an overhead fall protection anchor point.
- Material: Alloy steel, ED Coated Black
- Minimum Breaking Strength: 5000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



WEB SCAFFOLD CHOCKER

DXFP815002	2 ft. (0.6 m)
------------	---------------

- Web scaffold choker provides a secure, safe and extremely portable temporary fall protection anchor point on scaffold pipes or other suitable smaller diameter structural elements.
- Material: Polyester, steel
- Minimum Breaking Strength: 5000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



WELDING ANCHOR STRAP

DXFP817003	3 ft. (0.9 m)
DXFP817006	6 ft. (1.8 m)

- Welding choker style web anchor strap provides a strong, durable and flexible temporary fall protection anchor solutions for most welding or spark applications.
- Material: Aramid FR Webbing, Steel
- Minimum Breaking Strength: 5000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



DEWALT

CONCRETE

ANCHORS

SINGLE POINT SWIVEL ANCHOR FOR CONCRETE WITH BOLT

DXFP844031

- Swiveling Anchor Point for Concrete provides a strong, reusable and corrosion resistant anchor point for post-construction concrete applications.
- Material: High Strength Alloy Steel
- Length: 4.45 in. (11.3 cm) Width: 3 in. (7.62 cm)
- Minimum Breaking Strength: 10,000 lbs. / 44 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



CONCRETE ANCHOR STRAP D-RING ONE END AND WEB LOOP OTHER END

DXFP812003	3 ft. (0.9 m)
DXFP812004	4 ft. (1.2 m)
DXFP812006	6 ft. (1.8 m)


- Concrete web anchor strap with D-ring provides a strong, durable and flexible temporary fall protection anchor point. It is designed to be choked to rebar and embedded into the poured concrete and cut off once one construction is complete.
- Material: Polyester Web, Steel
- Minimum Breaking Strength: 5000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



SINGLE POINT ANCHOR FOR CONCRETE, WITHOUT BOLT

DXFP843101

- Swiveling Anchor Point for Concrete provides a strong, reusable and corrosion resistant anchor point for post-construction concrete applications.
- Material: High Strength Alloy Steel
- Length: 4.45 in. (11.3 cm) Width: 3 in. (7.62 cm)
- Minimum Breaking Strength: 10,000 lbs. / 44 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



REUSABLE CONCRETE ANCHOR

DXFP845101

- Reusable Concrete Anchor is designed for horizontal, vertical, or overhead concrete applications. The anchor's end expands to secure the anchor in a 3/4 inch (1.9 cm) mounting hole. A spring-tensioned trigger and retractor cables release the anchor with one hand to allow immediate removal and relocation to another hole.
- Material: Galvanized steel .25 in. (0.64 cm)
- Length: 10.96 in. (27.8 cm)
- Minimum Breaking Strength: 5000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



CONCRETE ANCHOR STRAP WEB LOOP BOTH ENDS

DXFP813003	3 ft. (0.9 m)
DXFP813004	4 ft. (1.2 m)
DXFP813006	6 ft. (1.8 m)

- Concrete web anchor strap with web loop provides a strong, durable and flexible temporary fall protection anchor point. It is designed to be choked to rebar and embedded into the poured concrete and cut off once one construction is complete.
- Material: Polyester Web, Steel
- Minimum Breaking Strength: 5000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



DEWALT

ROOFTOP ANCHORS

ROOF ANCHOR - SINGLE USE REAISED - ZINC COATED

DXFP841001

- Single Use, Raised Roof Anchor is designed for use on the ridge of pitched roofs. The anchor is made of coated steel with a 1 in. (2.54 cm) D-Ring style connection point.
- Material: Steel
- Overall Height: 6.38 in. (16.2 cm) Width: 2.23 in. (5.68 cm)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



ROOF ANCHOR - REUSABLE HEAVY DUTY

DXFP846000

- Heavy-Duty Roof Anchor is a lightweight, easy-to-install and reusable anchor point designed for use on various wood and metal rooftop profile. Designed for maximum flexibility, the two (2) steel plates have 6 holes for for nailing into wood structure and 6 holes for screws for easy installation. The O-ring can be safely used as anchor point for one user.
- Material: Alloy Steel, Rubber
- Length: 25.2 in. (63.9 cm) Weight: 5.09 lbs. (2.31 kg)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



ROOF ANCHOR - SINGLE USE ZINC COATED STEEL

DXFP841002

- Single Use, Raised Roof Anchor is designed for use on the ridge of pitched roofs. The anchor is made of coated steel with a 1 in. (2.54 cm) D-Ring style connection point.
- Material: Steel
- Overall Length: 13.1 in. (33.2 cm) Width: 2.23 in. (5.68 cm)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



REUSABLE - ROOFTOP ANCHOR

DXFP842001

- Reusable Rooftop Anchor is designed for use on wood, steel, and concrete. It works on nearly all roof pitches from flat to sheer. The anchor is made of coated steel for longer lasting product life. The anchor can be installed with either screws or nails (depending on roof pitch), and comes with all necessary fasteners.
- Material: Coated Steel
- Overall Height: 14.96 in. (38 cm) Width: 3 in. (7.62 cm)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



DEWALT

FALL PROTECTION CARABINERS

CARABINER - STANDARD SELF LOCKING STEEL 1/4 TURN 1 in. GATE OPENING

DXFP912001

- Quarter-Turn, Self-Locking, Bulb Style Steel Carabiner provides flexible solutions for connecting various fall protection equipment. With a 1 in. (2.54 cm) gate opening, the 3,600 lbs. (16kN) gate strength meets OSHA and ANSI standards for fall protection.
- Material: Galvanized Alloy Steel with Golden/Silver Passivation
- Minimum Breaking Strength: 9,000 lbs. / 40 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI 3259.12-2019, OSHA 1926.502, 1910.140



CARABINER - STANDARD SELF LOCKING ALUMINUM 1/4 TURN .83 in. GATE OPENING

DXFP915001

- Quarter-Turn, Self-Locking, Bulb Style Steel Carabiner provides flexible solutions for connecting various fall protection equipment. With a .83 in. (2.1 cm) gate opening, the 3,600 lbs. (16 kN) gate strength meets OSHA and ANSI standards for fall protection.
- Material: High Strength Aluminum Alloy
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.12-2019, OSHA 1926.502, 1910.140



CARABINER - STANDARD SELF LOCKING STEEL 1/4 TURN .85 in. GATE OPENING

DXFP911001

- Quarter-Turn, Self-Locking, Bulb Style Steel Carabiner provides flexible solutions for connecting various fall protection equipment. With a .85 in. (2.15 cm) gate opening, the 3,600 lbs. (16 kN) gate strength meets OSHA and ANSI standards for fall protection.
- Material: Galvanized Alloy Steel with Golden/Silver Passivation
- Minimum Breaking Strength: 10,000 lbs. / 44 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.12-2019, OSHA 1926.502, 1910.140



CARABINER - BULB TYPE SELF LOCKING ALUMINUM 1/4 TURN .67 in. GATE OPENING

DXFP914001

- Quarter-Turn, Self-Locking, Bulb Style Steel Carabiner provides flexible solutions for connecting various fall protection equipment. With a .67 in. (1.7 cm) gate opening, the 3,600 lbs. (16 kN) gate strength meets OSHA and ANSI standards for fall protection.
- Material: Galvanized Alloy Steel with Golden/Silver Passivation
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.12-2019, OSHA 1926.502, 1910.140



CARABINER - LARGE SELF LOCKING STEEL 1/4 TURN 2 in. GATE OPENING

DXFP982001

- Quarter-Turn, Self-Locking, Bulb Style Steel Tower Hook provides flexible solutions for connecting various fall protection equipment on a larger structural members. With a 2 in. (5 cm) gate opening, the 3,600 lbs. (16 kN) gate strength meets OSHA and ANSI standards for fall protection.
- Material: Galvanized Alloy Steel with Golden/Silver Passivation
- Minimum Breaking Strength: 3,600 lbs. / 16 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.12-2019, OSHA 1926.502, 1910.140



DEWALT

FALL PROTECTION HARNESSES

DEWALT 3000 Full Body Harness designed with features perfect for a wide variety of jobs and working conditions. The D3000 is available in a range of configurations:


- With and without our comfortable padded waist belt
- Tongue buckle and quick connect attachment points
- Integrated trauma straps, repellent webbing
- Resettable lanyard keepers
- Quick link adapter for fast personal SRL's connection

Superior design and craftsmanship make this a great harness for your crew.



D3000

D3000

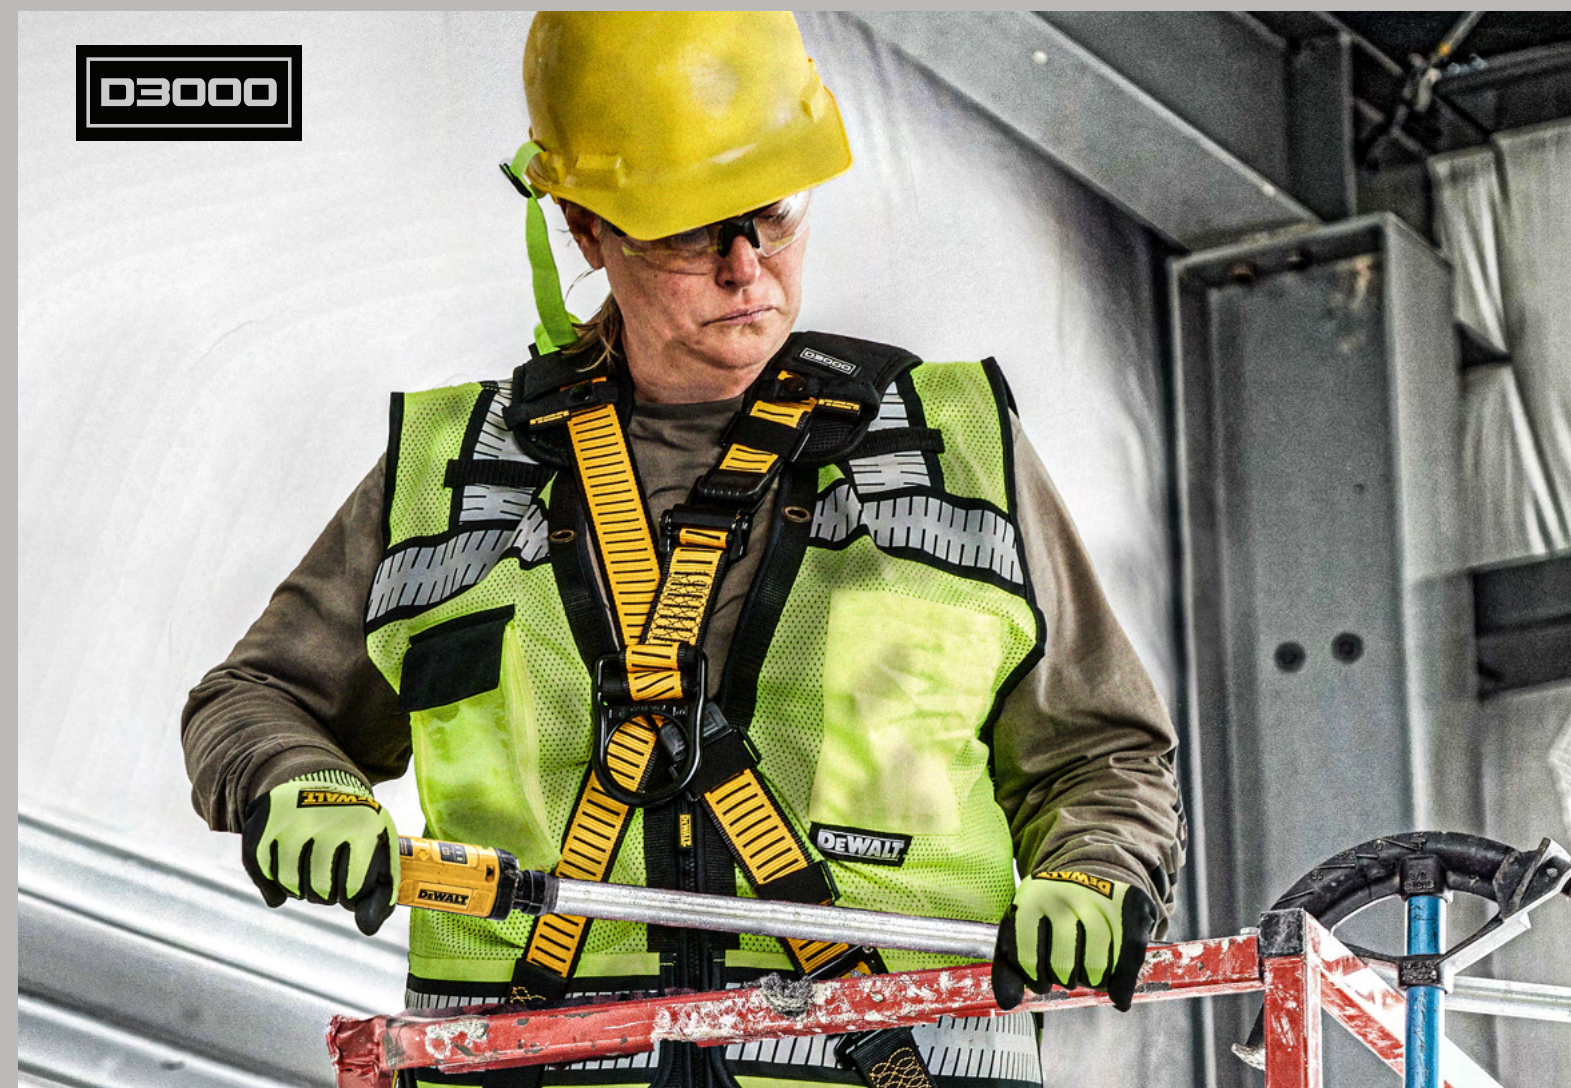

D1000


DEWALT D1000 Full Body Harness provides an exceptional range of features at an affordable price. D1000 is available with the following features:

- 5 points of adjustment
- Pass-through chest and tongue buckle leg connections
- Lanyard keepers
- Heavy duty, repellent polyester webbing
- Also available with removable shoulder pad for added comfort.



DEWALT

DEWALT Sizing Harnesses

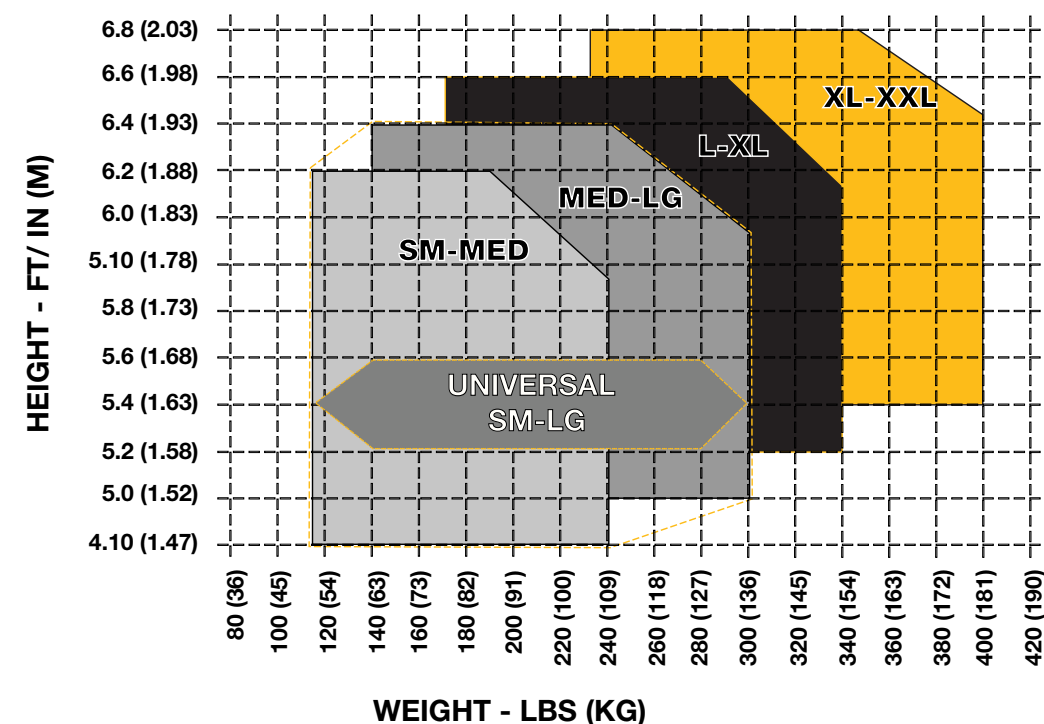

DEWALT

D3000

HARNESSES

The DEWALT D3000 Full Body Harness, designed with features perfect for a wide variety of jobs and working conditions. The D3000 is available in a range of configurations, with and without our comfortable padded waist belt, tongue buckle and quick connect attachment points, integrated trauma straps, repellant webbing, resettable lanyard keepers, and our quick link adapter for fast personal SRL's connection. These are just a few of the key features found in the D3000. Superior design and craftsmanship make this a great harness for your crew.

DURABILITY:
Polyester webbing with **Repellent Coating** resist stains from oil and water.

COMPLIANCE:
Protected label pack keeps label easily readable during inspection.



EASE OF INSPECTION:
All DEWALT harnesses come with a QR code and RFID tag for quick scan and registration into an asset management /inspection system.



SUSPENSION TRAUMA PROTECTION:
All D3000 harnesses include integrated Suspension Trauma Straps to protect the user in the event of a fall.



DXFP532131



VERSATILITY:
The quick connect SRL adapter allows for fast installation of your personal SRL while leaving the D-Ring free for lanyards and rescue device connections



CONVENIENT LANYARD STORAGE:
Resettable lanyard keepers to safely park unused lanyard leg.



VISIBLE FALL DETECTION:
Built in impact indicators show when a fall has occurred.

COMFORT:
Sturdy breathable waist belt for added comfort. Perfect for use with tool pouches

SPECIFICATIONS

WEBBING POLYESTER: 5000 LBS. / 2267 KG MIN. STATIC STRENGTH

BUCKELS AND ADJUSTERS: PLATED ALLOY STEEL

WEIGHT CAPACITY: OSHA 420 LBS. / 191 KG

MEETS ANSI Z359.11-2021, OSHA 1910.140, OSHA 1926.502



D3000

MODELS & SIZES



DXFP532011



DXFP532132



DXFP532021



DXFP537011

DEWALT D3000 Vest-Style Harness			Ordering Part Number			
Chest Connection	Leg Connection	D-Ring Location(s) Back, Side, Front, Shoulder	S - M	M - L	L - XL	XL - 2XL
Quick Connect	Tongue Buckle	Back	DXFP532011 (S-M)	DXFP532011 (M-L)	DXFP532011 (L-XL)	DXFP532011 (XL-2XL)
Quick Connect	Quick Connect	Back	DXFP532012 (S-M)	DXFP532012 (M-L)	DXFP532012 (L-XL)	DXFP532012 (XL-2XL)
Quick Connect	Tongue Buckle	Back, Side (2)	DXFP532031 (S-M)	DXFP532031 (M-L)	DXFP532031 (L-XL)	DXFP532031 (XL-2XL)
Quick Connect	Quick Connect	Back, Side (2)	DXFP532032 (S-M)	DXFP532032 (M-L)	DXFP532032 (L-XL)	DXFP532032 (XL-2XL)
Quick Connect	Tongue Buckle	Back, Front	DXFP532041 (S-M)	DXFP532041 (M-L)	DXFP532041 (L-XL)	DXFP532041 (2X-2XL)
Quick Connect	Quick Connect	Back, Front	DXFP532042 (S-M)	DXFP532042 (M-L)	DXFP532042 (L-XL)	DXFP532042 (2X-2XL)
Quick Connect	Tongue Buckle	Back, Side (2), Front	DXFP532051 (S-M)	DXFP532051 (M-L)	DXFP532051 (L-XL)	DXFP532051 (2X-2XL)
Quick Connect	Quick Connect	Back, Side (2), Front	DXFP532052 (S-M)	DXFP532052 (M-L)	DXFP532052 (L-XL)	DXFP532052 (2X-2XL)
Quick Connect	Tongue Buckle	Back, Shoulders (2)	DXFP532061 (S-M)	DXFP532061 (M-L)	DXFP532061 (L-XL)	DXFP532061 (XL-2XL)
Quick Connect	Quick Connect	Back, Shoulders (2)	DXFP532062 (S-M)	DXFP532062 (M-L)	DXFP532062 (L-XL)	DXFP532062 (XL-2XL)

Our Vest Style DEWALT D3000 harness comes in a wide range of options for use in general applications, work positioning, climbing and confined space entry.

DEWALT D3000 Vest-Style Harness, w/Belt			Ordering Part Number			
Chest Connection	Leg Connection	D-Ring Location(s) Back, Side, Front, Shoulder	S - M	M - L	L - XL	XL - 2XL
Quick Connect	Tongue Buckle	Back, Sides (2)	DXFP532131 (S-M)	DXFP532131 (M-L)	DXFP532131 (L-XL)	DXFP532131 (XL-2XL)
Quick Connect	Quick Connect	Back, Sides (2)	DXFP532132 (S-M)	DXFP532132 (M-L)	DXFP532132 (L-XL)	DXFP532132 (XL-2XL)
Quick Connect	Quick Connect	Back, Side (2), Front	DXFP532152 (S-M)	DXFP532152 (M-L)	DXFP532152 (L-XL)	DXFP532152 (XL-2XL)

For those working in tough construction environments, the DEWALT D3000 with waist belt is perfect. We have several options ideal for climbing and work positioning. The comfort waist belt provides an excellent option for work bags and tool tethering.

DEWALT D3000 Crossover Harness			Ordering Part Number			
Chest Connection	Leg Connection	D-Ring Location(s) Back, Side, Front, Shoulder	S - M	M - L	L - XL	XL - 2XL
Quick Connect	Tongue Buckle	Back, Front	DXFP532021 (S-M)	DXFP532021 (M-L)	DXFP532021 (L-XL)	DXFP532021 (XL-2XL)
Quick Connect	Tongue Buckle	Back, Sides (2), Front	DXFP532023 (S-M)	DXFP532023 (M-L)	DXFP532023 (L-XL)	DXFP532023 (XL-2XL)

For those that prefer the fit and comfort of a cross-over style harness, the DEWALT D3000 is a good choice. Both models come with a front D-Ring that make them perfect for ladder climbing applications.

DEWALT D3000 Welding Harness			Ordering Part Number			
Chest Connection	Leg Connection	D-Ring Location(s) Back, Side, Front, Shoulder	S - M	M - L	L - XL	XL - 2XL
Quick Connect	Tongue Buckle	Back	DXFP537011 (S-M)	DXFP537011 (M-L)	DXFP537011 (L-XL)	DXFP537011 (XL-2XL)
Quick Connect	Quick Connect	Back	DXFP537012 (S-M)	DXFP537012 (M-L)	DXFP537012 (L-XL)	DXFP537012 (XL-2XL)
Quick Connect	Tongue Buckle	Back, Sides (2)	DXFP537031 (S-M)	DXFP537031 (M-L)	DXFP537031 (L-XL)	DXFP537031 (XL-2XL)
Quick Connect	Quick Connect	Back, Sides (2)	DXFP537032 (S-M)	DXFP537032 (M-L)	DXFP537032 (L-XL)	DXFP537032 (XL-2XL)

The DEWALT D3000 welding harnesses are constructed using Aramid FR webbing for use in high heat environments. The webbing is an excellent choice to resist splatter and burns from welding slag.

DEWALT

D1000

HARNESSES

DEWALT D1000 Full Body Harness provides an exceptional range of features at an affordable price. The harness has 5 points of adjustment, pass-through chest and tongue buckle leg connections, lanyard keepers, and heavy-duty, repellent polyester webbing. Some models come with a removable shoulder pad included for added comfort.



DURABILITY:
Polyester webbing with **Repellent Coating** resist stains from oil and water.



COMPLIANCE:
Protected label pack keeps label easily readable during inspection.



EASE OF INSPECTION:
All DEWALT harnesses come with a QR code and RFID tag for quick scan and registration into an asset management /inspection system.



COMFORT:
Some models come with a removable shoulder pad for added comfort.

CONVENIENT LANYARD STORAGE:
Two lanyard keepers to safely park unused lanyard leg.

VISIBLE FALL DETECTION:
Built in impact indicators show when a fall has occurred.

SUSPENSION TRAUMA PROTECTION:
Optional suspension trauma straps to protect the user in the event of a fall.

DXFP512006

SPECIFICATIONS

- WEBBING POLYESTER: 5000 LBS. / 2267 KG MIN. STATIC STRENGTH
- BUCKLES AND ADJUSTERS: PLATED ALLOY STEEL
- WEIGHT RATING: OSHA 420 LBS. / 191 KG
- MEETS ANSI Z359.11-2021, OSHA 1910.140, OSHA 1926.502



D1000

MODELS & SIZES



OPTIONAL BACKPAD



DXFP102001

VEST - STYLE HARNESS



DXFP512001



DXFP512002



DEWALT D1000 Vest-Style Harness				Ordering Part Number			
Chest Connection	Leg Connection	D-Ring Location(s) Back, Side, Front, Shoulder	S - MM	- L L	- XL	XL - 2XL	UNIVERSAL
Pass-Thru	Pass-Thru	Back	DXFP512001 (S-M)	DXFP512001 (M-L)	DXFP512001 (L-XL)	DXFP512001 (XL-2XL)	DXFP512001 (U)
Pass-Thru T	ongue Buckle	Back	DXFP512002 (S-M)	DXFP512002 (M-L)	DXFP512002 (L-XL)	DXFP512002 (XL-2XL)	DXFP512002 (U)

VEST - STYLE HARNESS WITH BACK PAD



DXFP512005



DXFP512006



DEWALT D1000 Vest-Style Harness, w/Back Pad				Ordering Part Number		
Chest Connection	Leg Connection	D-Ring Location(s) Back, Side, Front, Shoulder	S - M	M - L	L - XL	XL - 2XL
Pass-Thru	Pass-Thru	Back	DXFP512005 (S-M)	DXFP512005 (M-L)	DXFP512005 (L-XL)	DXFP512005 (XL-2XL)
Pass-Thru	Tongue Buckle	Back	DXFP512006 (S-M)	DXFP512006 (M-L)	DXFP512006 (L-XL)	DXFP512006 (XL-2XL)

DEWALT

SRLs



Self Retracting Lifelines

Self-Retracting Lifelines (SRL's) provide users increased safety and versatility over traditional lanyards. With no slack in the lifeline of SRL's, trip hazards and free fall distances are reduced. DEWALT® SRL's provide extreme flexibility with versions that can be mounted overhead, at foot-level and on the users harness in single or twin (100% tie-off) variations.

INNOVATIVE DEWALT® DESIGN

DEWALT® SRL's are extremely rugged and loaded with features to meet the demanding conditions in which you work.



FALL PROTECTION PRODUCTS THAT MEET YOUR NEEDS



UNDERSTANDING ANSI Z359.14-2021 SRL STANDARD

On June 17, 2021, ANSI approved the new Z359.14-2021 revision, with updated safety requirements and categorization for Self-Retracting Devices (SRDs). This revision supersedes the previous Z359.14-2014 revision and went into effect on August 1, 2023.

KEY CHANGES IN ANSI Z359.14-2021

- **Types** – SRL-LE removed, SRL-P added
- **New** test weights and specific SRL-P tests added
- **New** label marking requirements by Class
- **Class** – Classes changed from A and B to Class 1 and Class 2 with revised performance requirements. All SRL's must now have class marking on product labels to help ensure the right product is used in the application



Comparison between the old and new standard

ANSI Z359.14-2014 (Old)

Types:

- SRL : Self Retracting Lanyard
- SRL-R – SRL's with integral rescue capability
- SRL-LE – SRL's designed to meet Leading Edge requirements.

Class A:

- Tested overhead w / 282 lbs. (128 kg)
- Must arrest within 24 in. (0.61 m)
- Average Force 1350 lbs. (6 kN)

Class B:

- Tested overhead w / 282 lbs. (128 kg)
- Must arrest within 54 in. (1.37 m)
- Average Force less then 900 lbs. (4 kN)
- Only "LE" models were required to meet Leading Edge requirements

ANSI Z359.14-2021 (New)

SRL Types:

- SRL : Self Retracting Lanyard
- SRL-R – SRL's with integral rescue capability.
- SRL-P – SRL's designed to installed on the user's harness

Class 1:

- Tested overhead w / 310 lbs. (140 kg)
- Must arrest within 42 in. (1.22 m)
- Max Free Fall of 2 ft. (0.61 m)

Class 2:

- Tested Meet Class 1 overhead w / 310 lbs. (140 kg)
- Must arrest fall within 42 in. (1.22 m)
- Average Force less then 1350 lbs. (6 kN)
- Meet Leading edge requirements
- Arrest distance printed on label and instruction
- Max Free Fall of 6 ft. (1.8 m)

STATIC AND DYNAMIC STRENGTH TESTING


- Hold 3000 lbs. (1360 kg) for 1 minute
- Drop test with a 282 lbs. (128 kg) weight
- Specific test for SRL-P did not exist

- Hold 3600 lbs. (1632 kg) for 1 minute
- Drop test with a 310 lbs. (140 kg) weight
- Specific Test for SRL-P:**
 - Dual statistic to 3600 lbs. (1632 kg)
 - Dual connection 1800 lbs. (8 kN) Force
 - Abrasion test to 3600 lbs. (1632 kg) after abrasion for Tie-Back models



SRL CLASS 1 PERSONAL

DEWALT single and twin personal SRL's provide users with a lightweight, versatile and rugged fall protection connection. These SRL's feature a number of hook options at the anchor end for a wide variety of applications.



VERSATILITY:
Swiveling Captive Eye Structural Anchorage Point 3600 lbs. (16 kN)



FLEXIBILITY:
SRL Connector* easily mounts through the pre-installed SRL channel on DEWALT D3000 harnesses, leaving the D-Ring accessible for rescue.
*Included with twin units and available separately (DXFP990151)

DURABILITY:
High Impact Strength Polymer casing, reinforced corners to ensure structural integrity. Recessed labels for increased product life.

COMPLIANCE:
Protected label pack within energy absorber, keeps labels safe and easily readable during inspection.



EASY DOCUMENTATION:
All DEWALT SRL's come with an RFID tag for quick scanning and tracking in the DFP Safety Vault™ system.

LIFELINE MATERIAL:
High Strength Dyneema webbing
WORKING LENGTH:
NON TIE-BACK 6 ft. (1.8 m)
TIE-BACK 9 ft. (2.74 m)

SECURE:
All connectors are dual action and comply with ANSI Z359.12-2019

DXFP240312-006*
Model shown*

CLASS 1 PERSONAL			HARNES CONNECTOR		ANCHOR CONNECTOR					
	Part Number	PRODUCT DESCRIPTION	STEEL CARABINER	PERSONAL SRL CONNECTOR	ALUMINUM CARABINER	STEEL SNAP HOOK	ALUMINUM SNAP HOOK	STEEL REBAR HOOK	ALUMINUM REBAR HOOK	STEEL TIE-BACK HOOK
SINGLE LEG	DXFP242411-006	D100P Personal SRL - Single - Aluminum Carabiner	•		•					
	DXFP242311-006	D100P Personal SRL - Single - Aluminum Rebar Hook	•						•	
	DXFP242211-006	D100P Personal SRL - Single - Aluminum Snap Hook	•				•			
	DXFP240311-006	D100P Personal SRL - Single - Steel Rebar Hook	•					•		
	DXFP240211-006	D100P Personal SRL - Single - Steel Snaphook	•			•				
	DXFP240511-009	D100P Personal SRL - Tie-Back - Single - Steel Snaphook	•							•
TWIN LEG	DXFP242412-006	D100P Personal SRL - Twin - Aluminum Carabiner		•	•					
	DXFP242312-006	D100P Personal SRL - Twin - Aluminum Rebar Hook		•					•	
	DXFP242212-006	D100P Personal SRL - Twin - Aluminum Snap Hook		•			•			
	DXFP240312-006	D100P Personal SRL - Twin - Steel Rebar Hook		•				•		
	DXFP240212-006	D100P Personal SRL - Twin - Steel Snap Hook		•		•				
	DXFP240512-009	D100P Personal SRL - Tie-Back - Twin - Steel Snaphook		•						•



DEWALT

SRL
CLASS 1

DEWALT anchor mounted SRL's provide users with a dependable, versatile and rugged fall protection connector for a wide variety of applications.

DURABILITY:
High Impact Strength Polymer casing, reinforced corners to ensure structural integrity. Recessed labels for increased product life.

ERGONOMIC:
Large and well-balanced carrying handles for increased ergonomics, even with a gloved hand. (On select Models).



EASY DOCUMENTATION:
All DEWALT SRL's come with an RFID tag for quick scanning and tracking in the DFP Safety Vault™ system.

COMFORT:
Durable, soft rubber handle for sure grip.




CONVENIENCE:
*Includes Carabiner and Tagline.



*Tagline 20 ft. (6.10 m) and above

VERSATILITY:
Swiveling Captive Eye Structural Anchorage Point 3600 lbs. (16 kN)



CABLE BRUSH:
Patent pending metal cable guide with wire brush to reduce dirt and debris from entering the housing.



SECURE:
Impact indicating dual action snap hooks comply with ANSI Z359.12-2019

DXFP210111-030*
Model shown*

CLASS 1 - SRL'S				
Part Number	PRODUCT DESCRIPTION	CARRYING HANDLE	CABLE GUIDE WIRE BRUSH	TAGLINE
1 in. (25.4 mm) Polyester Web Lifeline				
DXFP230111-011	D100 - Standard SRL - Web 11 ft. (3.35 m)			
DXFP230111-020	D100 - Standard SRL - Web 20 ft. (6.10 m)			●
3/16 in. (4.8 mm) Galvanized Cable Lifeline				
DXFP210111-010	D100 - Standard SRL - Galvanized Cable - 10 ft. (3.05 m)		●	
DXFP210111-020	D100 - Standard SRL - Galvanized Cable - 20 ft. (6.10 m)		●	●
DXFP210111-030	D100 - Standard SRL - Galvanized Cable - 30 ft. (9.14 m)	●	●	●
DXFP210111-050	D100 - Standard SRL - Galvanized Cable - 50 ft. (15.2 m)	●	●	●
DXFP210111-090	D100 - Standard SRL - Galvanized Cable - 90 ft. (27.4 m)	●	●	●
13/64 in. (5.2 mm) Stainless Steel Cable Lifeline				
DXFP221111-018	D100 - Standard SRL - Stainless Steel Cable - 18 ft. (5.49 m)	●	●	●
DXFP221111-025	D100 - Standard SRL - Stainless Steel Cable - 25 ft. (7.62 m)	●	●	●
DXFP221111-050	D100 - Standard SRL - Stainless Steel Cable - 50 ft. (15.2 m)	●	●	●
DXFP221111-080	D100 - Standard SRL - Stainless Steel Cable - 80 ft. (24.3 m)	●	●	●




DEWALT

SRL
CLASS 2

DEWALT line of anchor mounted Class 2, leading edge, SRL's provide users with a dependable, versatile and rugged fall protection connection that can be mounted at foot-level or above.

DURABILITY:
High Impact Strength Polymer casing, reinforced corners to ensure structural integrity. Recessed labels for increased product life.

ERGONOMIC:
Large and well-balanced carrying handles for increased ergonomics, even with a gloved hand. (25 ft. (7.62 m) and larger units).



EASY DOCUMENTATION:
All DEWALT SRL's come with an RFID tag for quick scanning and tracking in the DFP Safety Vault™ system.




CONVENIENCE:
*Includes Carabiner and Tagline.



*Tagline 20 ft. (6.10 m) and above

VERSATILITY:
Swiveling Captive Eye Structural Anchorage Point 3600 lbs. (16 kN)



CABLE BRUSH:
Patent pending metal cable guide with wire brush to reduce dirt and debris from entering the housing.

COMFORT:
Durable, soft rubber handle for sure grip.

PROTECTION:
Protected label pack within energy absorber, keeps label safe and easily readable during inspection.

SECURE:
Dual action snap hooks comply with ANSI Z359.12-2019


DXFP210221-025*
Model shown*




CLASS 2 - LEADING EDGE - SRL's	
Part Number	PRODUCT DESCRIPTION
DXFP210221-018	D200 - SRL - Leading Edge - Galvanized Cable - 18 ft (5.49 m)
DXFP210221-025	D200 - SRL - Leading Edge - Galvanized Cable - 25 ft (7.62 m)
DXFP210221-050	D200 - SRL - Leading Edge - Galvanized Cable - 50 ft (15.2 m)
DXFP210221-080	D200 - SRL - Leading Edge - Galvanized Cable - 80 ft (24.3 m)




DEWALT energy absorbing lanyards come in a variety of styles and configurations to fit the requirements of most work situations. Available with internal and external energy absorption, single & twin leg, with steel & aluminum connectors. You're sure to find a model that fits your specific work requirements.

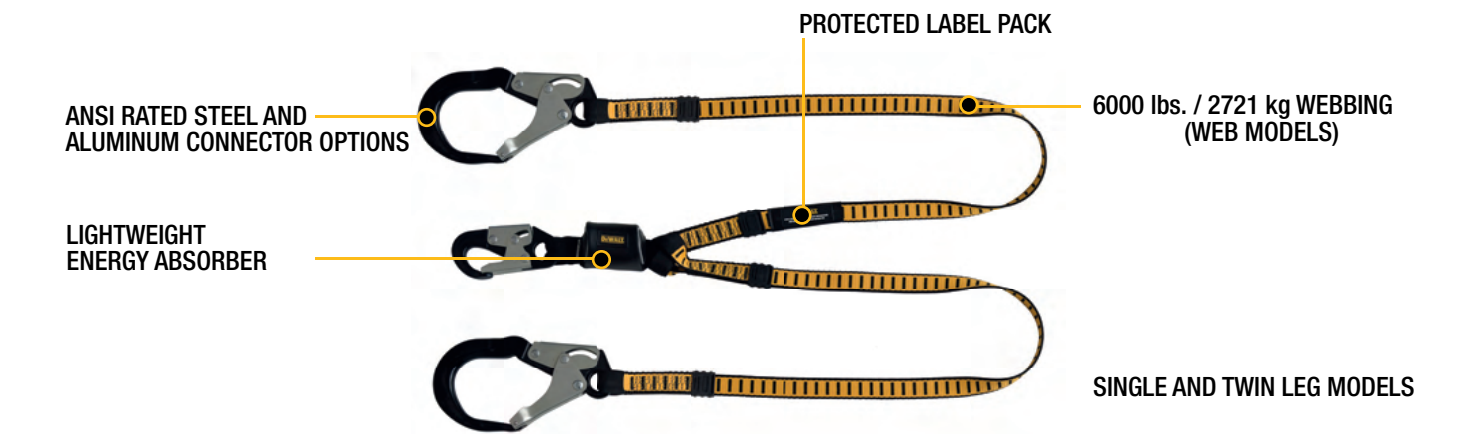


EXTERNAL ENERGY ABSORBING LANYARDS



 DXFP611100	DEWALT 6 Ft. External Energy Absorber			General Use Lanyards		
	Part Number	Legs	Legs Material	Specialty	Harness End	Anchor End
	DXFP611110	Single	Web	General	Steel Snap Hook	Steel Snap Hook
	DXFP611120	Twin	Web	General	Steel Snap Hook	Steel Snap Hook
	DXFP611100	Single	Web	General	Steel Snap Hook	Steel Snap Hook
	DXFP611130	Twin	Web	General	Steel Snap Hook	Steel Rebar Hook
	DXFP611510	Single	Web	General	Aluminum Snap Hook	Aluminum Rebar Hook
	DXFP611530	Twin	Web	General	Aluminum Snap Hook	Aluminum Rebar Hook
 DXFP615110	DEWALT 6 Ft. External Energy Absorber - Tie Back					
	Part Number	Legs	Legs Material	Specialty	Harness End	Anchor End
	DXFP615110	Single	Web	Tie-Back to Web	Steel Snap Hook	Tie-Back Steel Snap Hook
	DXFP615111	Single	Web	Tie-Back to D-Ring	Steel Snap Hook	Steel Snap Hook
	DXFP615120	Twin	Web	Tie-Back to Web	Steel Snap Hook	Tie-Back Steel Snap Hook
	DXFP615121	Twin	Web	Tie-Back to D-Ring	Steel Snap Hook	Steel Snap Hook
	DXFP615130	Twin	Web	Tie-Back	Steel Snap Hook	Steel Rebar Hook
	DXFP615530	Twin	Web	Tie-Back	Aluminum Snap Hook	Aluminum Rebar Hook
 DXFP616100	DEWALT 6 Ft. External Energy Absorber - Specialty Lanyards					
	Part Number	Legs	Legs Material	Specialty	Harness End	Anchor End
	DXFP616100	Single	FR Web	Welding	Steel Snap Hook	Steel Snap Hook
	DXFP616110	Twin	FR Web	Welding	Steel Snap Hook	Steel Snap Hook
	DXFP621120	Single	Web	12 Ft. Freefall	Steel Snap Hook	Steel Snap Hook
	DXFP621130	Twin	Web	12 Ft. Freefall	Steel Snap Hook	Steel Snap Hook
	DXFP626100	Single	Coated Cable	Leading Edge	Steel Snap Hook	Steel Snap Hook
	DXFP626110	Single	Coated Cable	Leading Edge	Steel Snap Hook	Steel Rebar Hook

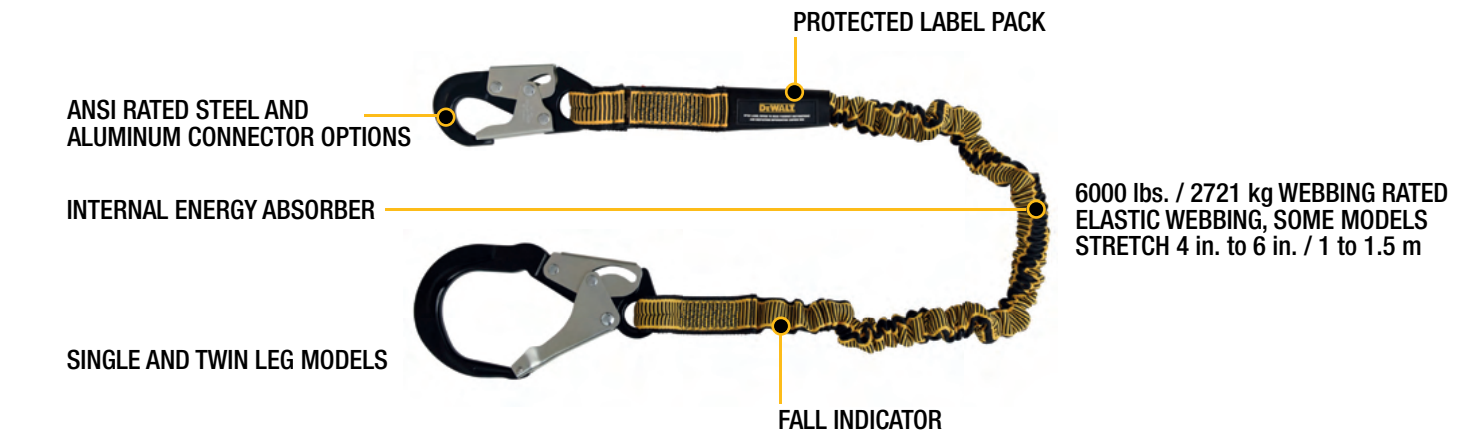INTERNAL ENERGY ABSORBING LANYARDS & WORK POSITIONING DEVICES



 DXFP612110	DEWALT 6 Ft. Internal Energy Absorber - Elastic Lanyards					
	Part Number	Legs	Legs Material	Specialty	Harness End	Anchor End
	DXFP612110	Single	Web	General Use	Steel Snap Hook	Steel Rebar Hook
	DXFP612111	Single	Web	General Use	Steel Snap Hook	Steel Snap Hook
	DXFP612120	Twin	Web	General Use	Steel Snap Hook	Steel Snap Hook
	DXFP612130	Twin	Web	General Use	Steel Snap Hook	Steel Rebar Hook
 DXFP613510	DEWALT 6 Ft. Internal Energy Absorber - Stretch Lanyards (4 Ft. to 6 Ft.) (1 M. to 1.5 M.)					
	Part Number	Legs	Legs Material	Specialty	Harness End	Anchor End
	DXFP613100	Single	Web	General Use	Steel Snap Hook	Steel Snap Hook
	DXFP613110	Single	Web	General Use	Steel Snap Hook	Steel Rebar Hook
	DXFP613120	Twin	Web	General Use	Steel Snap Hook	Steel Snap Hook
	DXFP613130	Twin	Web	General Use	Steel Snap Hook	Steel Rebar Hook
	DXFP613510	Single	Web	General Use	Aluminum Snap Hook	Aluminum Rebar Hook
	DXFP613530	Twin	Web	General Use	Aluminum Snap Hook	Aluminum Rebar Hook
 DXFP614100	DEWALT Working Position Devices					
	Part Number	Legs	Legs Material	Specialty	Harness End	Anchor End
	DXFP614100	Chain	Web	Positioning	Steel Snap Hook	Steel Rebar Hook (2)
	DXFP614110	6 Ft. Fixed	Web	Positioning	Steel Snap Hook	Steel Rebar Hook
	DXFP614111	6 Ft. Adjustable	Chain	Positioning	Steel Snap Hook	Steel Rebar Hook
	DXFP614150	Web	Web	Positioning	Aluminum Snap Hook	Aluminum Rebar Hook (2)

DEWALT

VERTICAL ROPE LIFELINES

DEWALT Vertical Rope Lifelines have a diameter of 5/8 in. (1.6 cm) with a Locking snap hook on the anchor end with the other end being cut and taped.

- Comes in 25, 50, 100 ft. (7.62, 15.24, 30.5 m)
- Materials either Poly Steel or Polydac


Part Number	LENGTH	ROPE MATERIALS
DXFP100025	25 ft. (7.6 m)	Polysteel
DXFP100050	50 ft. (15.2 m)	Polysteel
DXFP100100	100 ft. (30.5 m)	Polysteel
DXFP101025	25 ft. (7.6 m)	Polydac
DXFP101050	50 ft. (15.2 m)	Polydac
DXFP101100	100 ft. (30.5 m)	Polydac

VERTICAL LIFELINE WITH ROPE ADJUSTER

DXFP210050

The DEWALT 50 ft. (15 m) Vertical Lifeline with Rope Adjuster is designed as a key component for roof top safety. The rope is water and abrasion resistant for strength and durability, while the built in rope adjuster provides the versatility of free movement or fixing in place for all restraint.

- Worker capacity range: 130-310 lbs. (58-140 kg)
- Min. Breaking Strength: 5000 lbs. (2267 kg)
- Materials: Polysteel rope, alloy steel, polyester
- Meets ANSI Z359.1-2007, OSHA 1910.66, OSHA 1926.502




SELF TRACKING REMOVABLE ROPE GRAB

DXFP150000

The DEWALT Self tracking removable rope grab moves along the lifeline with the user either up or down. It is removable and has a unique antipanic feature.

- Capacity: 310 lbs. (140 kg)
- Min. Breaking Strength: 3372 lbs. 15 kN)
- Materials: Galvanized alloy steel with golden yellow/silver passivation
- Meets ANSI Z359.15-2014, OSHA 1910.66, OSHA 1926.502




SELF TRACKING REMOVABLE ROPE GRAB WITH ENERGY ABSORBING LANYARD (1.5 ft. / 0.4 m)

DXFP150010

The DEWALT Self tracking removable rope grab with energy absorbing lanyard moves along the lifeline with the user either up or down. It is removable and has a unique antipanic feature and a factory attached energy absorber with steel snap hook.

- Capacity: 310 lbs. (140 kg)
- Min. Breaking Strength: 3372 lbs. 15 kN)
- Min. Breaking Strength: Energy absorbing lanyard 6000 lbs. (26 kN)
- Materials: webbing 1.75 in. (4.4 cm) wide high tenacity polyester, alloy steel
- Meets ANSI Z359.15-2014, OSHA 1910.66, OSHA 1926.502




REMOVABLE CAPTIVE ROPE GRAB WITH ENERGY-ABSORBING LANYARD (3 ft. / 0.9m)

DXFP150020

The DEWALT Self tracking removable rope grab with energy absorbing lanyard moves along the lifeline with the user either up or down. It is removable and has a unique antipanic feature and a factory attached energy absorber with steel snap hook.


- Capacity: 310 lbs. (140 kg)
- Min. Breaking Strength: 3372 lbs. 15 kN)
- Min. Breaking Strength: Energy absorbing lanyard 6000 lbs. (26 kN)
- Materials: webbing 1.75 in. (4.4 cm) wide high tenacity polyester, alloy steel
- Meets ANSI Z359.15-2014, OSHA 1910.66, OSHA 1926.502




DEWALT

TEMPORARY HORIZONTAL LIFELINE

DEWALT Temporary Horizontal Lifelines are lightweight, easy to install and adjustable between 15 ft. (4.6 m) and 100 ft. (30.5 m). Made of 5/8 in. (1.6 cm) kernmantle rope, it includes installation carabiner at each end, tension indicator, two(2) anchor straps. Meets OSHA 1910.66, OSHA 1926.502

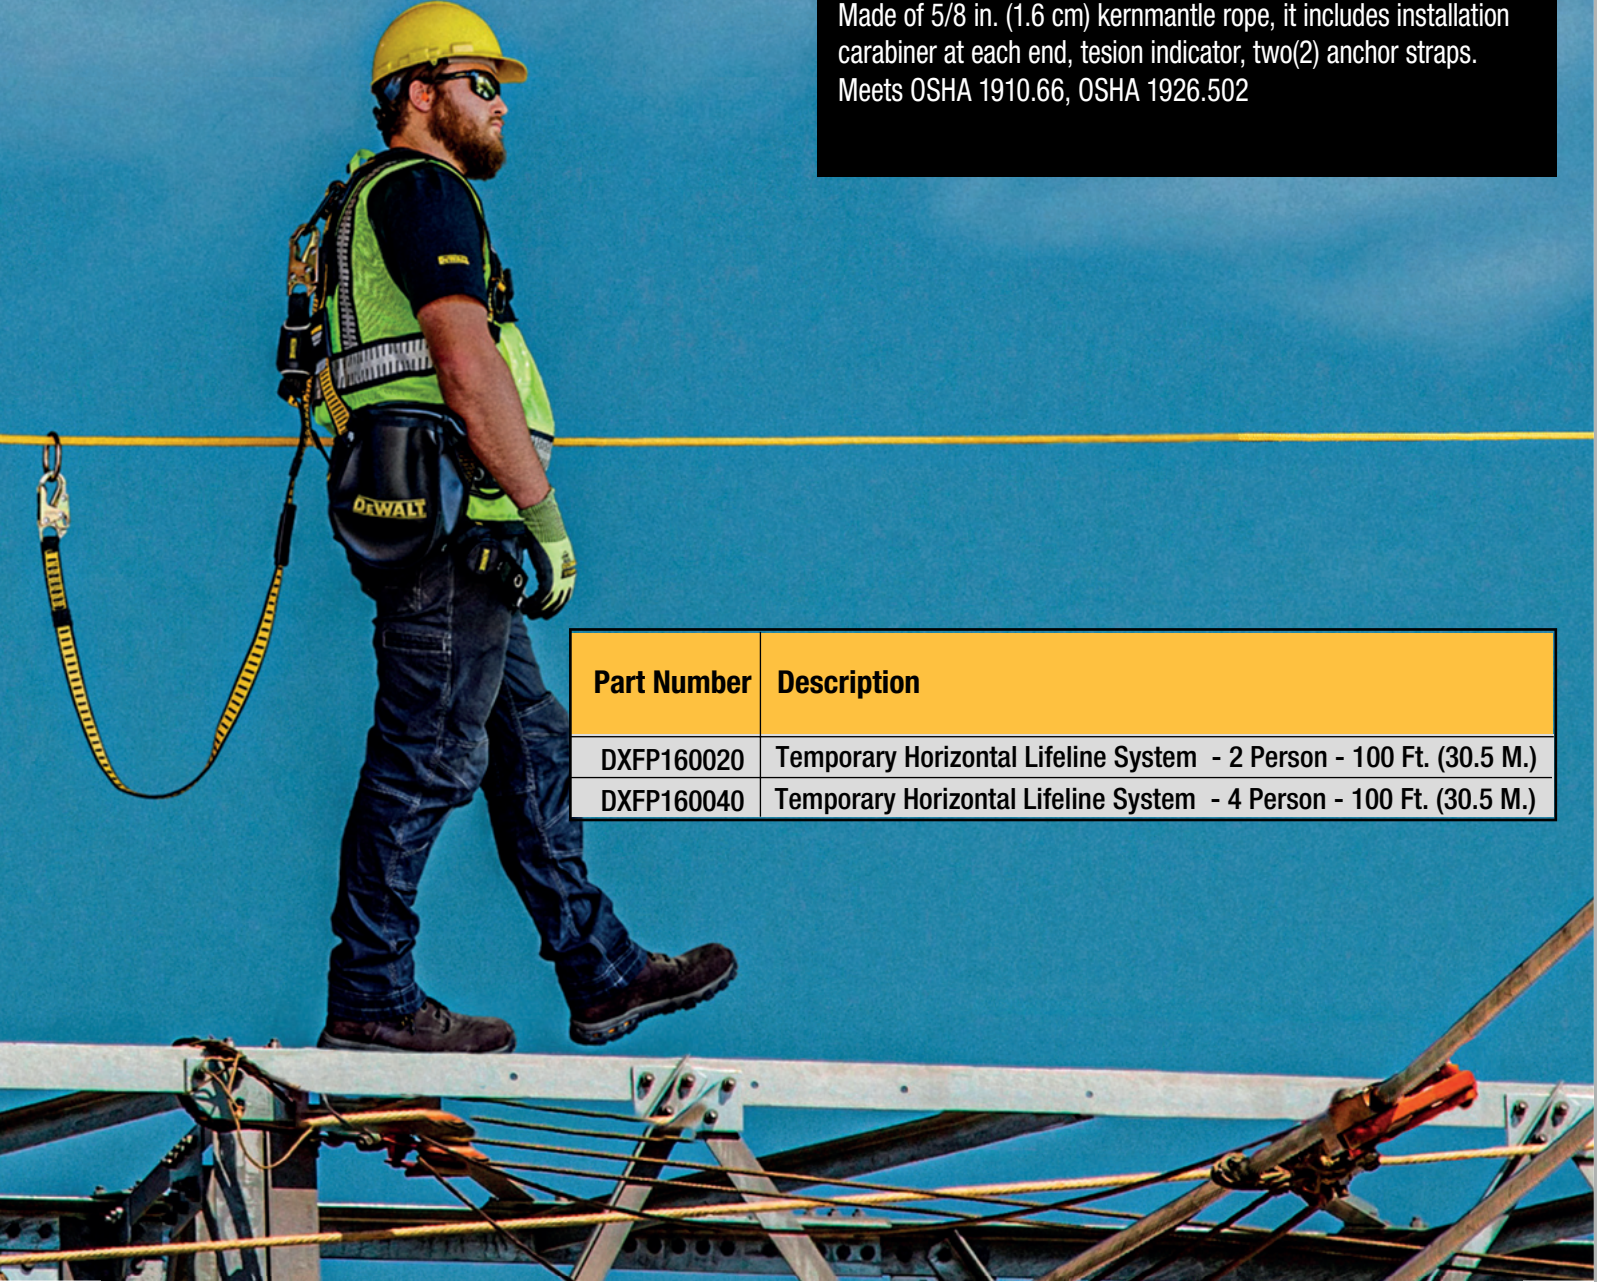

Part Number	Description
DXFP160020	Temporary Horizontal Lifeline System - 2 Person - 100 Ft. (30.5 M.)
DXFP160040	Temporary Horizontal Lifeline System - 4 Person - 100 Ft. (30.5 M.)



DXFP160040

26 **GUARANTEED TOUGH.®**

27

DEWALT

ROOFTOP SAFETY KITS

THE DEWALT ROOFTOP SAFETY KIT OFFERS A COMPLETE SETUP FOR ROOFING APPLICATIONS, AVAILABLE IN TWO VERSIONS:

DXFP110050 includes a D1000 harness with 5 pts of adjustment and pass-thru leg buckle connections.

DXFP120050 includes a D1000 harness with 5 pts of adjustment and tongue buckle leg connection.

Both kits include a reusable rooftop anchor, and a 50 ft. (7.6 m) lifeline with an integrated energy absorber for full compliance and safety on the job.

It all comes in a convenient container for easy transportation and storage.



DEWALT

FALL PROTECTION SAFETY KITS

THE DEWALT FALL PROTECTION KIT PROVIDES THE WORKER WITH A READY SYSTEM FOR ATTACHING TO AN APPROVED ANCHOR POINT.

DXFP110001 includes a D1000 harness with 5 pts of adjustment and pass-thru leg buckle connections.

DXFP120001 includes a D1000 harness with 5 pts of adjustment and tongue buckle leg connection.

DXFP110101 includes a D1000 harness with 5 pts of adjustment and tongue buckle leg connections, and a 3 ft. (0.9 m) Web Anchor Strap-Choker with D-Ring on each end.

All kits include a 6 ft. (1.8 m) energy absorbing lanyard, all to help ensure working safely at height.

It all comes in a convenient container for easy transportation and storage.



DXFP110101



DXFP120001



DEWALT

DROP PREVENTION PRODUCTS



Whether you're up on a roof, building a skyscraper or on a scaffolding or ladder, you need to have confidence in your safety equipment to keep you and others safe and sound. DEWALT® Dropped Objects Prevention products are easy to use and are built for the toughest work environments so you know you can concentrate on the job without other worries.

THE NEED FOR DROP PREVENTION SAFETY PRODUCTS

FALLING OBJECTS DATA

6 ft. (1.8 m) HEIGHT
3 lbs. (1.36 kg) WRENCH

THERE IS NO SAFE HEIGHT
FROM WHICH TO DROP A TOOL

178 lbs. (0.8 kN)
IMPACT FORCE

15 ft. (4.5 m) DEFLECTION

Industry data shows that dropped objects are a major cause of property damage, workplace injuries and even fatalities. Understanding the need to implement a dropped object prevention program helps to mitigate all these hazards and helps to ensure a safer working environment.

* National Bureau of National Statistics

DL00001887 Rev.A 05/06/2021

DEWALT

DROP PREVENTION THE COMPLETE SYSTEM



ANCHOR
POINT
TOOL
ATTACHMENT
TOOL
LANYARD

Drop Prevention System - In order to protect workers from injury and equipment from damage it is essential to select all components of a drop prevention system to securely attach tools and prevent accidental drops. The three main components of a system are attachment points, connectors such as tool lanyards, and anchorage points.



Tool attachment points - Attachment points are a secure point on the tool that must be rated for at least the total weight of the tool. The user must select an attachment point that is appropriate for the tool and then secure it per the attachment instructions. Once the attachment point is in place the tool is considered **Lanyard Ready™** and the connector or lanyard can be attached.



Connectors - All tools are required to be tethered or connected to an anchorage so that they remain attached and protected from a fall in the event of a drop. Selecting the appropriate connector or tool lanyard based upon each tool's weight and configuration is essential to drop prevention.



Anchorage - The final component of the system is anchorages and holders. The key variable in selecting the appropriate anchorage is the weight. Tools weighing 5 lbs. (2.3 kg) or less may be attached to the body. This can be done by securing the connector end to anchors like a tool holder, wristband or a secure point on the user's tool belt or harness. For all tools greater than 5 lbs. (2.3 kg) the user must secure the connector end to an anchorage point rated for at least the weight of the tool.

V-RING TOOL ATTACHMENTS

- Used to create a secure attachment point on most tools without a lanyard hole.
- Cinch design allows user to quickly secure equipment.
- Secure in place using our tool tape.
- Coated alloy steel V-Ring attachment point
- Meets ANSI/ISEA 121-2018 Standard



Part Number	RELAXED LENGTH	MAX WEIGHT CAPACITY	WINGS
DXDP710200	12.5 in. (31 cm)	36 lbs. (15.8 kg)	None
DXDP710201	12.5 in. (31 cm)	36 lbs. (15.8 kg)	Single
DXDP710221	12.5 in. (31 cm)	36 lbs. (15.8 kg)	Double
DXDP710222	21.6 in. (54 cm)	80 lbs. (36.2 kg)	Double

TOOL ATTACHMENTS WITH SWIVELING D-RING

- Used to create a secure attachment point on most tools without lanyard hole.
- Secure in place using our tool tape
- High strength polyester webbing
- Steel alloy D-Ring with swivel connection
- Meets ANSI/ISEA 121-2018 Standard



Part Number	RELAXED LENGTH	MAX WEIGHT CAPACITY	QUANTITY PER PACK
DXDP710411	2.5 in. (6 cm)	3 lbs. (1.3 kg)	6
DXDP710422	4.5 in. (11 cm)	3 lbs. (1.3 kg)	6
DXDP710433	5.5 in. (14 cm)	3 lbs. (1.3 kg)	6
DXDP710444	6.5 in. (16.5 cm)	3 lbs. (1.3 kg)	3
DXDP710455	8.5 in. (21.5 cm)	3 lbs. (1.3 kg)	3
DXDP400161	Assorted 1 each	3 lbs. (1.3 kg)	5



COILED TOOL LANYARD

DXDP710900

- PU coated steel cable for corrosion resistance and durability
- Stainless steel carabiners for quick connection
- Swiveling design prevents tangles and fast recoil
- Coiled length 4 in. (10 cm); extended length 60 in. (152 cm)
- Max working capacity: 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard



ELASTIC TOOL ATTACHMENT

DXDP710140

- Shock absorbing design to gradually slow dropped tool
- Elastic Cord Cinch with adjustable barrel lock for tool attachment
- Coated steel alloy D-ring with swivel connection, for secure attachment
- Relaxed length 11 in. (27 cm); extended length 15 in. (38 cm)
- Max working capacity 15 lbs. (6.8 kg)
- Meets ANSI/ISEA 121-2018 Standard
- Comes in a pack of 3



CINCH LOOP ATTACHMENT

DXDP710600

- Designed to safely tether small tools through captive tool hole
- Durable and reusable polyester cord
- Coated alloy steel D-ring for secure attachment
- Length is 6.6 in. (16 cm.)
- Max working capacity 5 lbs. (2.3 kg)
- Meets ANSI/ISEA 121-2018 Standard
- Comes in a pack of 3



HARD HAT LANYARD

DXDP610400


- High-stretch elastic polyester material
- Double lock buckle attaches to harness or vest
- Tethering loop to connect to slots on hard hat
- Relaxed length 16 in. (40 cm); extended length 34 in. (86 cm)
- Maximum safe working capacity: 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard
- **DXDP910400:** Comes in a pack of 10



SINGLE LEG LANYARD (HEAVY DUTY)

DXDP720510

- Durable polyester blended webbing
- Treaded loop end that grips the tool when attached
- Swiveling aluminum alloy carabiner with captive eye and swivel
- Relaxed length 70 in. (177 cm)
- Max working capacity 80 lbs. (36.2 Kg)
- Meets ANSI/ISEA 121-2018 Standard

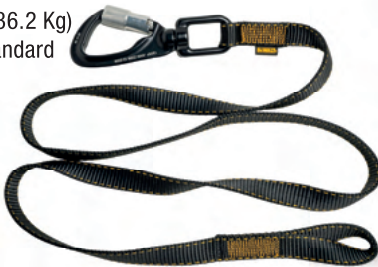

WIRE TOOL ATTACHMENT

DXDP710700

- Corrosion resistant to withstand weathering
- PU coating over cable wire for protection and durability
- Designed to safely tether small tools through captive tool hole
- Max capacity of 2 lbs. (0.9 kg)
- Full length 6 in. (15 cm)
- Meets ANSI/ISEA 121-2018 Standard
- Comes in a pack of 6



WIRE TOOL ATTACHMENT

DXDP710710


- Corrosion resistant to withstand weathering
- PU coating over cable wire for protection and durability
- Screws easily connect to create a one-step attachment point
- Designed to safely tether small tools through captive tool hole
- Max capacity of 3 lbs. (1.3 kg)
- Full length 6 in. (15 cm)
- Meets ANSI/ISEA 121-2018 Standard
- Comes in a pack of 6



WRISTBAND TOOL LANYARD

DXDP610310

- Durable polyester webbing secures to wrist
- Built-in tool lanyard provides quick connection with tool attachment points
- Elastic webbing helps reduce the forces on the wrist in the event of a drop
- Wrist Measurement: S/M 5 in. (12 cm) – 7 in. (17 cm)
- Relaxed length 13.75 in. (35 cm); extended length 16.5 in. (41 cm)
- Maximum safe working capacity: 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard



CLIP TO LOOP SPRING LANYARD

DXDP711100

- Lightweight polyurethane cable for tethering lightweight tools and objects such as mobile phones
- Coiled length 12 in. (30 cm); extended length 36 in. (91 cm)
- Max working capacity: 2 lbs. (0.91kg)
- Meets ANSI/ISEA 121-2018 Standard
- Comes in a pack of 3



ELASTIC TOOL LANYARDS

- Durable polyester blended webbing
- Anodized aluminum alloy carabiner with captive eye
- Barrel-Lock or Cinch loop end
- Meets ANSI/ISEA 121-2018 Standards

DXDP720200

DXDP720300

DXDP720220

Part Number	RELAXED LENGTH	EXTENDED LENGTH	MAX WEIGHT CAPACITY	LANYARD LEG
DXDP720200	32 in. (81 cm)	51 in. (129 cm)	15 lbs. (6.8 kg)	Single
DXDP720220	32 in. (81 cm)*	51 in. (129 cm)*	15 lbs. (6.8 kg)	Twin
DXDP720300	24.4 in. (60 cm)	43 in. (109 cm)	25 lbs. (11.3 kg)	Single
DXDP720310	24.4 in. (60 cm)*	43 in. (109 cm)*	25 lbs. (11.3 kg)	Twin
DXDP720500	39 in. (99 cm)	67 in. (170 cm)	35 lbs. (15.8 kg)	Single

(Per leg)*

QUICK CONNECT TOOL LANYARDS SYSTEM

- Durable polyester blended webbing
- Anodized aluminum alloy carabiner with captive eye
- Elastic cord cinch with adjustable barrel lock for tool attachment
- Modular connection for quick exchange of tools
- Relaxed length 37 in. (93 cm); Extended length 51 in. (129 cm)
- Max working capacity 5 lbs. (2.3 kg)
- Meets ANSI/ISEA 121-2018 Standards

DXDP710501

DXDP710211

DXDP710500

Part Number	DESCRIPTION
DXDP710501	Quick connect tool lanyard
DXDP710211	Quick connect tool attachment
DXDP710500	Elastic attachment

POWER TOOL LANYARDS

The DEWALT Power Tool Lanyards are designed to be used with tools that have a secure, **Lanyard Ready™** attachment point in place. The lanyards are made with polyester webbing and aluminum components to provide durability and longevity even in the toughest work environments. Dual anodized aluminum carabiners with captive eye & swivel both end, along with the elastic design combine to provide freedom of movement and tangle free operation during use. All of our lanyards are tested and meet ANSI/ISEA 121-2018 Standard.

Part Number	RELAXED LENGTH	EXTENDED LENGTH	MAX WEIGHT CAPACITY
DXDP721500	24 in. (61 cm)	38 in. (98 cm)	15 lbs. (6.8 kg)
DXDP721501	24 in. (61 cm)	38 in. (98 cm)	25 lbs. (11.3 kg)
DXDP721510	41 in. (104 cm)	75 in. (190 cm)	15 lbs. (6.8 kg)
DXDP721511	41 in. (104 cm)	75 in. (190 cm)	25 lbs. (11.3 kg)

DEWALT



ANCHOR STRAPS

DXDP813002 (50 lbs. / 22.6 kg)

DXDP813012 (80 lbs. / 36.3 kg)

- Abrasion resistant sleeve for improved life
- The D-ring provides capacity for multiple tool connections depending on weight allows for easy connection to beams and rails
- Length 24 in. (60 cm)
- Max capacity 50 lbs. (22.6 kg) or 80 lbs. (36.3 kg)
- Meets ANSI/ISEA 121-2018 Standard



WRISTBAND TOOL ANCHOR

DXDP610300

- Durable polyester material for long wear
- Pull-on design is easy to take on and off
- Adjusts to any wrist size - One size fits all
- Coated alloy steel D-ring attachment point for tethering lightweight hand tools
- Maximum safe working capacity: 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard



TAPE MEASURE HOLDER

DXDP610200

- Hook and loop straps secure tape measure inside holder for safe and easy tethering
- Accommodates tape measures up to 35 ft. (10.5 m)
- Rugged polyester nylon body
- Coated alloy steel D-Ring for connecting to tool lanyards
- Steel belt clip securely attaches to a tool belt
- Maximum safe working capacity of 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard



RADIO-MOBILE PHONE HOLDER KIT

DXDP610100 (no lanyard)

DXDP910600 (lanyard included)

- Rugged polyester body stretches to fit most mobile phones
- Heavy-duty elastic hook & loop straps protect for greater protection
- Coated alloy steel D-Ring on back for connecting to tool lanyards
- Holder includes lanyard and phone connector for complete drop prevention system
- Max working capacity 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard



NO SPILL PARTS POUCH

DXDP110001

- The unique enclosure is designed to prevent contents from dropping out, even when turned upside down.
- 3 Loops for belt attachment
- Ventilation eyelet for air flow
- Microfiber material cushioned from inside
- Length: 11 in. (28 cm)
- Width: 8 in. (20 cm)
- Maximum safe working capacity of 30 lbs. (13 Kg)
- Meets ANSI/ISEA 121-2018 Standard



QUICK CONNECT TOOL TETHERING KIT

DXDP910100

Tether up to four 5 lbs. (2.3 kg) tools

Kit Includes:

- Detachable Loops 3-Pack, with modular quick snap buckle
- Self-Adhering Tool Tape - 12 ft. (3.7 m) Roll, requires no heat to apply
- Detachable Single Carabiner Tool Lanyard - 5 lbs. (2.3 kg) max capacity, with modular connecting and anodized aluminum carabiner
- Durable polyester blended webbing, having a relaxed length 37 in. (93 cm); extended length 51 in. (129 cm)
- Meets ANSI/ISEA 121-2018 Standard



COILED TAPE MEASURING KIT

DXDP910200

For secure attachment of tape measures

Kit Includes

- Tape measure boot with hook and loop straps secure tape measure inside holder for safe and easy tethering
- Coated Steel alloy D-Ring for connecting to tool lanyards
- Coiled tool tether with coated Stainless-Steel carabiners for quick connection
- Swiveling design prevents tangles and fast recoil
- Coiled length 4 in. (10 cm); extended length 60 in. (152 cm)
- Max working capacity: 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard



COILED TOOL TETHERING KIT

DXDP910150

Tether up to four 2 lbs. (0.9 kg) tools

Kit Includes

- Three 2.5 in. (6 cm) high strength Polyester tool attachments with coated steel alloy Swivel D-Ring for secure attachment with 3 lbs. (1.3 kg) max capacity
- Self-Adhering Tool Tape - 12 ft. (3.7 m) Roll, requires no heat to apply
- Coiled tool lanyard with coated stainless-steel carabiners for quick connection
- Swiveling design prevents tangles and fast recoil
- Coiled length 4 in. (10 cm); extended length 60 in. (152 cm)
- Max working capacity: 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard



QUICK CONNECT TAPE MEASURING KIT

DXDP910300

For secure attachment of tape measures

Kit Includes

- Tape measure boot with hook and loop straps secure tape measure inside holdert for safe and easy tethering
- Coated steel alloy D-Ring for connecting to tool lanyards
- Detachable single carabiner Tool Lanyard - 5 lbs. (2.3 kg) max capacity, with modular connecting buckle and anodized aluminum carabiner.
- Durable polyester blended webbing, having a relaxed length 37 in. (93 cm); extended length 51 in. (129 cm)
- Max working capacity: 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard





Manufactured and Distributed by:

Trademark Licensee: DFP Safety Corp. 20711 Holt Av. Suite 1525 Lakeville, MN 55044

1-800- 391-1862

A licensee of DEWALT Industrial Tool Co.

www.DFPSAFETY.com

P/N: DL301001, Rev: A, Date: 2024.01.04



© 2024 DEWALT. DEWALT® is a registered trademark of the DEWALT Industrial Tool Co., used under license. All rights reserved. The yellow and black color scheme is a trademark for DEWALT Power Tools and Accessories.

All rights reserved. Neither this catalogue nor its text, illustrations, drawings or any part thereof, may be reproduced, stored in a retrieval system, photocopied, recorded or transmitted in any form, whether electronic or otherwise, without our consent. To the best of our knowledge, all descriptions and illustrations contained in, this catalogue are correct at the time of going to print. We cannot, however, be held liable for any inaccuracies of description or illustration and reserve the right to change specifications without notification. © DEWALT® 2024.